

Cim 39L

RIGHT ANGLE BALL VALVE FOR WASHING MACHINES - PN 16



This article was made in compliance with the quality management requirements of standard ISO 9001:2008. All articles are tested according to the standard EN 12266-1:2003. It can be used in water and sanitary systems.


It is guaranteed for 5 years.

It is made of a brass alloy that complies with standard EN 12165-CW617N-M.

Nominal Pressure: PN 16

Operating temperature: -15 to 90°C


FLOW AND PRESSURE DROP

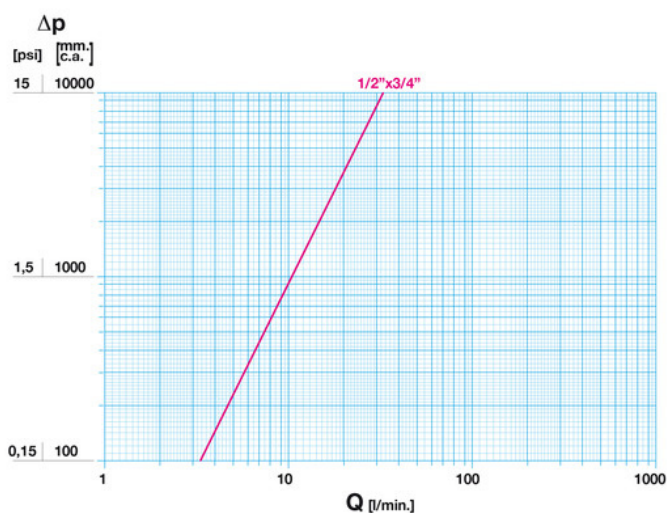

Notes:

- 1 l/min = 0,06 m³/h
- 1 m³/h = 16,67 l/min
- 1 bar = 10.000 mm w.c.
- 1 psi = 690 mm w.c.


PRESSURE TEMPERATURE RATINGS

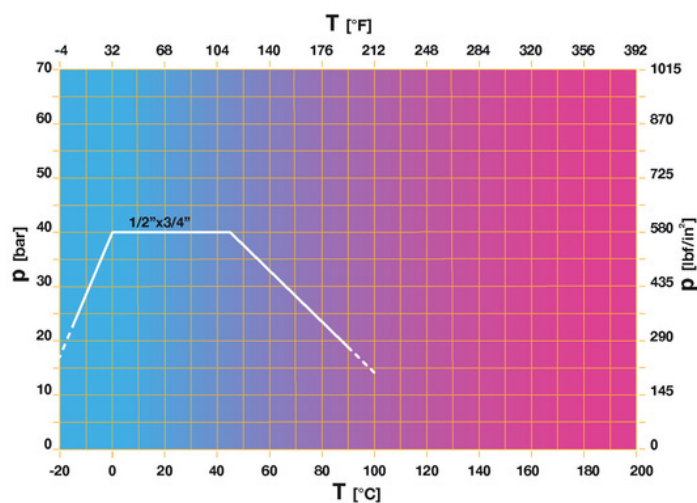

Notes:

- 1 bar = 14,5 psi
- 1 bar = 14,5 lbf/in²
- °C = 5/9 x (°F-32)
- °F = 32 + (9/5 x °C)

TECHNICAL DRAWING

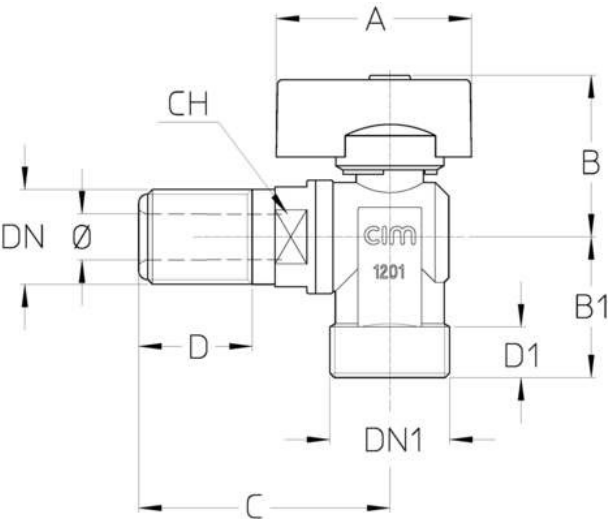

DNxDN1	1/2"x3/4"
Φ mm	10
Grms.	190
A	43
B	35
B1	31
C	55
D	25
D1	11,5
CH	22

Thread:
ISO 228

TECHNICAL CHARACTERISTICS

KV CM CS MT	
DN	1/2"x3/4"
Ø mm	10
KV	2
CM	1,5
CS	2
MT	9

KV = Capacity in m³/h at pressure drop of 1 bar.
CM = Operating torque in Nm.
CS = Starting torque in Nm.
MT = Stem breaking torque in Nm.

OUR CERTIFICATIONS

