

Cim 46

RIGHT ANGLE BALL VALVE - MALE/COMPRESSION - PN 16



This article was made in compliance with the quality management requirements of standard ISO 9001:2008. All articles are tested according to the standard EN 12266-1:2003. It can be used in water and sanitary systems.


It is guaranteed for 5 years.

It is made of a brass alloy that complies with standard EN 12165-CW617N-M.

Nominal Pressure: PN 16

Operating temperature: -20 to 90°C


FLOW AND PRESSURE DROP

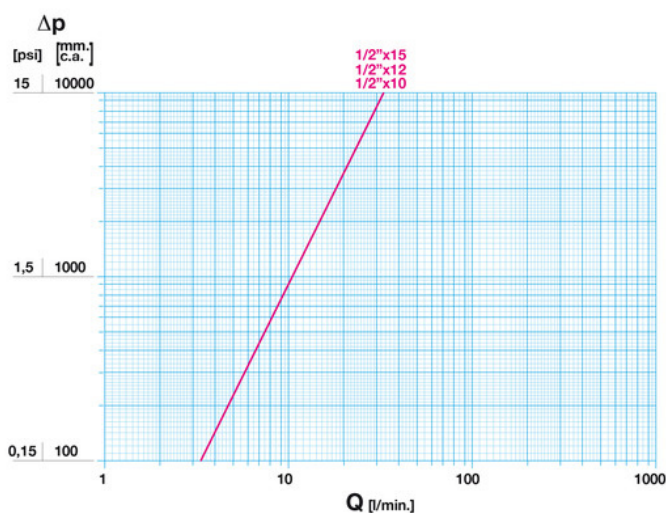

Notes:

- 1 l/min = 0,06 m³/h
- 1 m³/h = 16,67 l/min
- 1 bar = 10.000 mm w.c.
- 1 psi = 690 mm w.c.


PRESSURE TEMPERATURE RATINGS

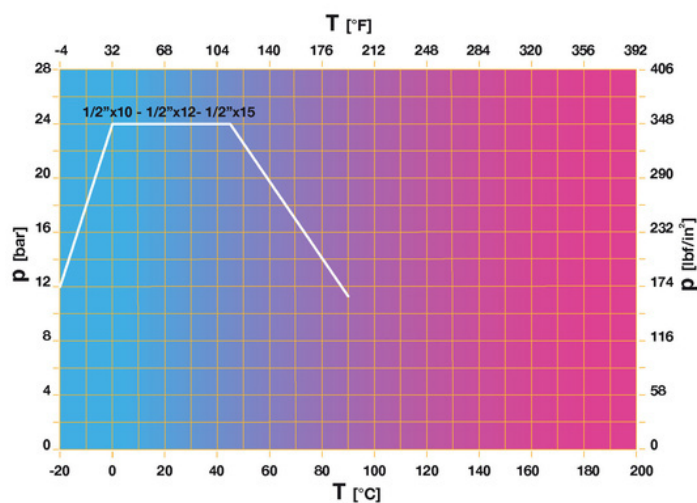

Notes:

- 1 bar = 14,5 psi
- 1 bar = 14,5 lbf/in²
- °C = 5/9 x (°F-32)
- °F = 32 + (9/5 x °C)

TECHNICAL DRAWING

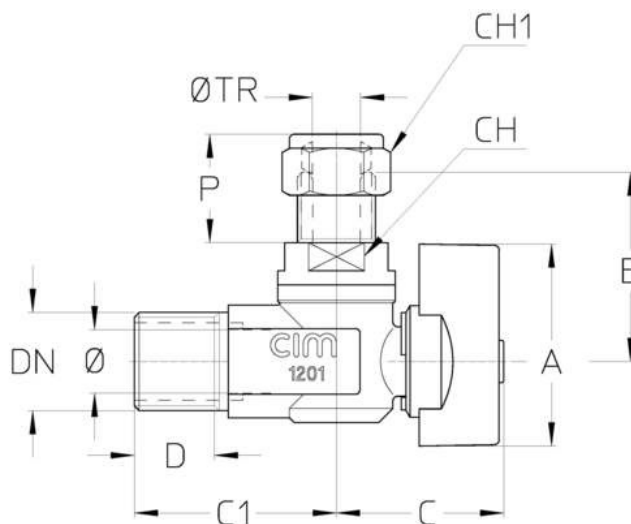

DN	1/2"	1/2"	1/2"
Ø TR	10	12	15
Ø mm	9	9	9
Grms.	205	195	205
A	43	43	43
B	40	40	40
C	35	36	36
C1	43	43	43
D	20	20	20
P	20	20	21,5
CH	22	22	24
CH1	24	24	24

Thread:
ISO 228

TECHNICAL CHARACTERISTICS

KV CM CS MT			
DNxTR	1/2"x10	1/2"x12	1/2"x15
Ø mm	9	9	9
KV	2	2	2
CM	1,5	1,5	1,5
CS	2	2	2
MT	9	9	9

KV = Capacity in m³/h at pressure drop of 1 bar.

CM = Operating torque in Nm.

CS = Starting torque in Nm.

MT = Stem breaking torque in Nm.

OUR CERTIFICATIONS

